

## QPEVO-S-XXV IP67


QPEVO-S-XXV IP67 constant-Voltage IP67 LED driver that operates from 176-264Vac input with excellent power factor and THD feature. This series of products is specially designed for direct power supply applications such as LED strips. The high efficiency of these drivers and compact plastic case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over

### → APPLICATION

- Strip light

### → FEATURES

- Built-in active PFC function
- Input Voltage 220-240VAC
- Protection SCP/OLP/OTP
- Compact plastic case, free air convection
- Efficiency 89%
- Water proof and ul dr/Damp/Wet Location
- Input surge protection 2kV line-line
- Three years warranty

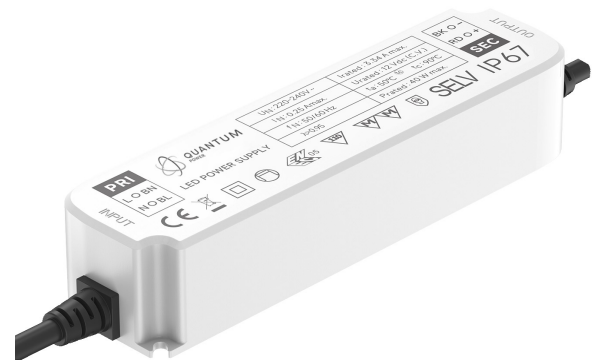

## → Technical data

Output	Constant Voltage	12VDC	24VDC
	Current Range	0-8.33A	0-4.17A
	Voltage Accuracy	±5%	
	Output HF current ripple(≥1KHz)	±5%	
	Output LF current ripple(≤120Hz)	±5%	
	SVM	≤0.4	
	P <sub>st</sub>	≤1	
	Efficiency(Typ.)	87%	89%
Input	Rated input voltage	220-240VAC	
	Range of input voltage	176-264VAC	
	Frequency(Hz)	47-63 Hz	
	Displacement factor	≥0.9	
	Power Factor	0.95@Full load,230V	
	Input Current max	0.68A	
	Start-up time	<0.5S	
	No Load Power	≤0.5W	
Protection	THD (Typ.)	<10%@Full load,230V	
	Over Load Protection	110-150% YES/Auto Resume	
	Short circuit Protection	YES/Auto Resume	
Environment	Over Temperature Protection	YES/Auto Resume	
	Operating Temperature	-40℃ ~+75℃	
	Humidity	20%-90%RH	
	Tc	90℃	85℃
	Storage Temperature	-40℃ ~+85℃	
Life time	>50000h@Tc=75℃		
Surface	Dimension	162.5X42.5X32(LXWXH)mm	
standards	EN 61347-1;EN 61347-2-13;EN 62384;EN 61547;EN55015,EN61000-3-2,EN 61000-3-3		
Others	ErP	EU 2019/2020	
	RoHS	RoHS (2011/65/EU) (EU)2015/863	
Note	<p>1.All parameters NOT specially mentioned are measured at 230Vac input and 25℃ of ambient temperature.</p> <p>2.Ripple &amp; Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1μF &amp; 47 μF parallel capacitor.</p> <p>3.This LED driver meets the EMI specifications above, but EMI performance of a lighting fixture also depends on the other devices on the fixture.</p> <p>4.When the withstand voltage test is performed, the gas discharge tube grounding/disconnecting device (nut and metal lock piece) located on the driver input should be temporarily removed to prevent the gas discharge tube inside the driver from functioning(refer to IEC60598-1-10.2).After the test is completed, the nut and metal lock piece must be reinstalled to restore the power line to the ground surge protection function and ensure reliable contact between the metal lock piece and the end cover.</p>		

**→ MODEL LIST**

Model	Input Voltage Range	Output Voltage	Output Current Range	Max output Power	Power Factor	Typical Efficiency
QPEVO -100-12 IP67 L	176~264Vac	12V	0~8.33A	100W	0.95	87%
QPEVO -100-24 IP67 L	176~264Vac	24V	0~4.17A	100W	0.95	89%


Note:

Test condition; 230Vac/50Hz, at full load:


**→ CIRCUIT BREAKER**

I <sub>peak</sub>	T <sub>width</sub>	B10	B16	B20	C10	C16	C20
44.6A	302μs	5pcs	9pcs	11pcs	9pcs	15pcs	19pcs

**→ WIRING DIAGRAM**

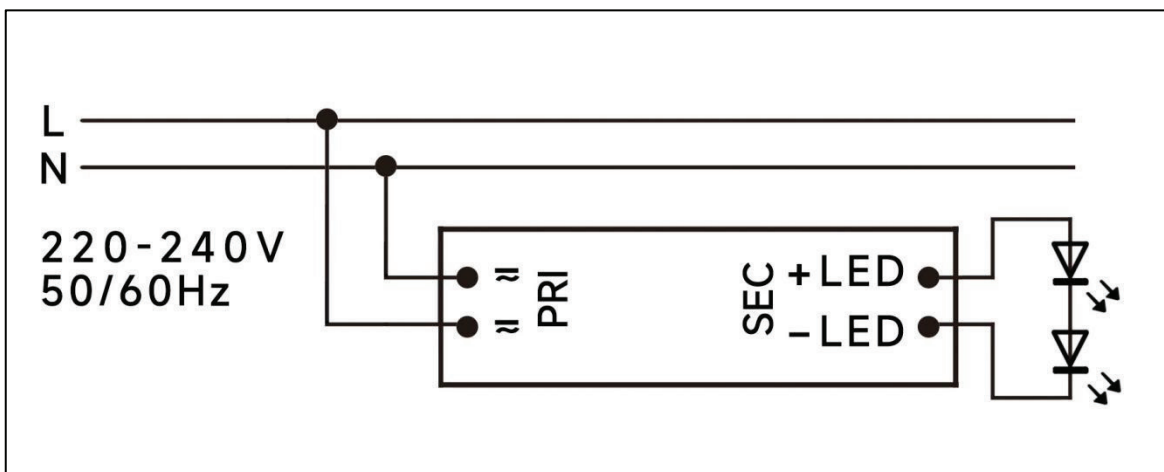

→ **2D DIAGRAM**

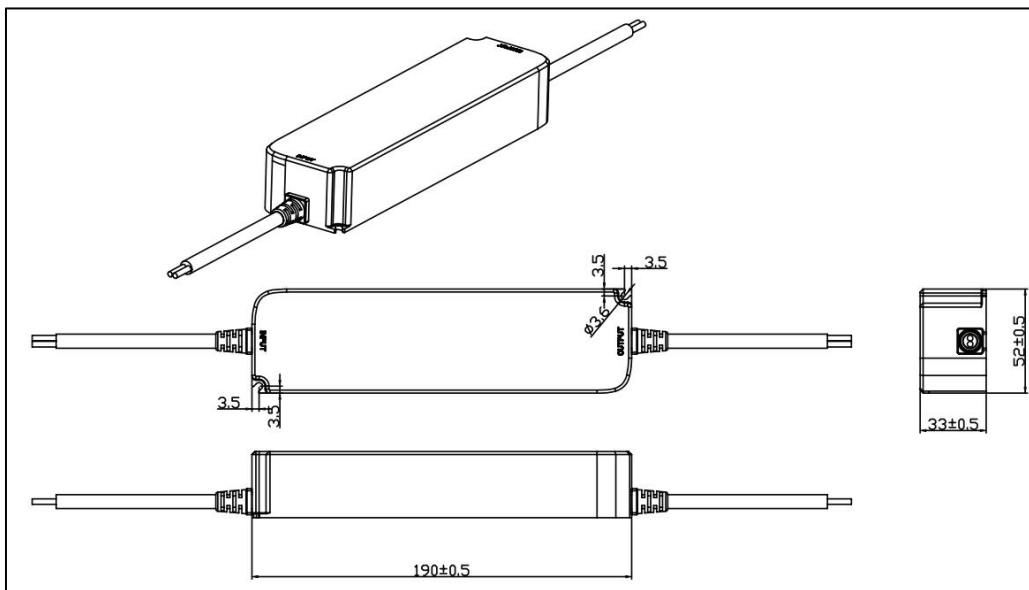


TYPE	Total Length	Outside Color	Inside Wires Color	Wire Model/Diameter
Input wire	0.36M	Black	Brown/Blue	H05RN-F/2x10mm <sup>2</sup>
Output wire	0.36M	Black	Red/Black	H05RN-F/2x10mm <sup>2</sup>


Note:

Wire length of input and output can be changed as customer requirement

**→ DERATING**

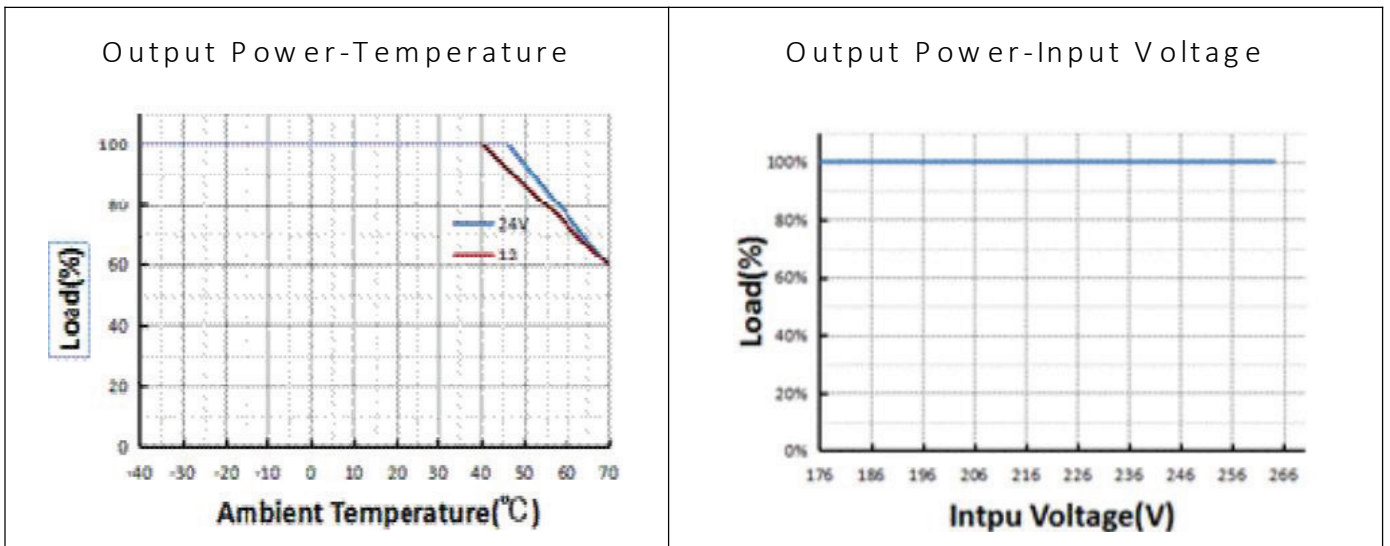


**→ OPERATING WINDOW**

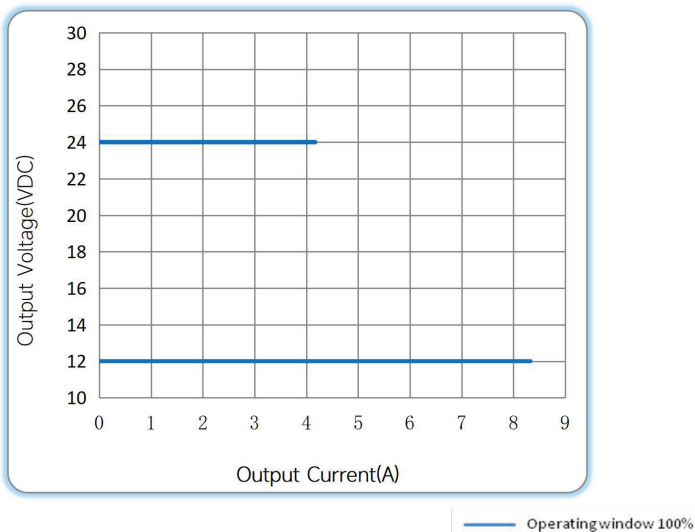


**→ CURVE FOR QPEVO-S-XXV-IP67**


Lifetime vs. Temperature Curve

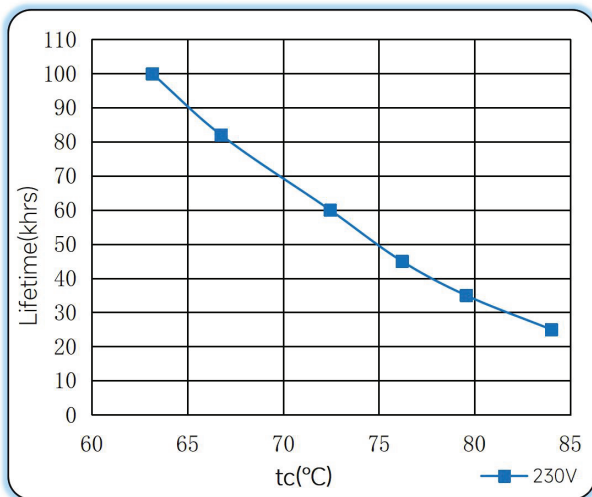

Efficiency vs. Load

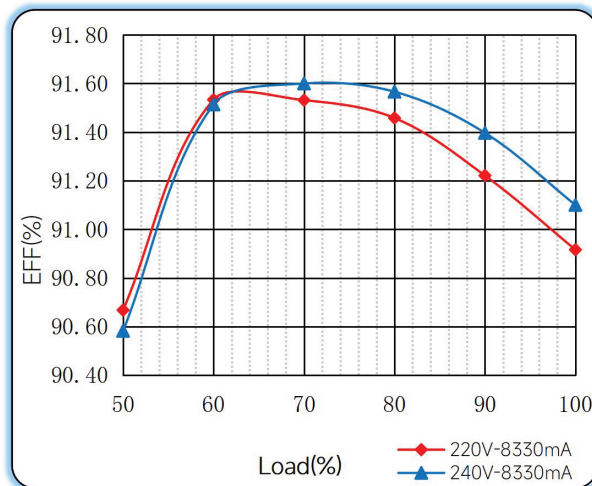

Power Factor Characteristics

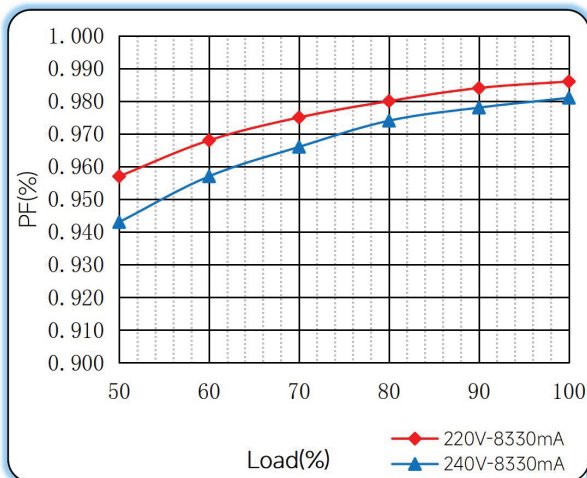

THD vs. Load

